


University AI infrastructure: physical concept

20 MW IT x PUE 1.25 = 25 MW facility | Full-load 219 GWh/year | No utility offer or uptime certification

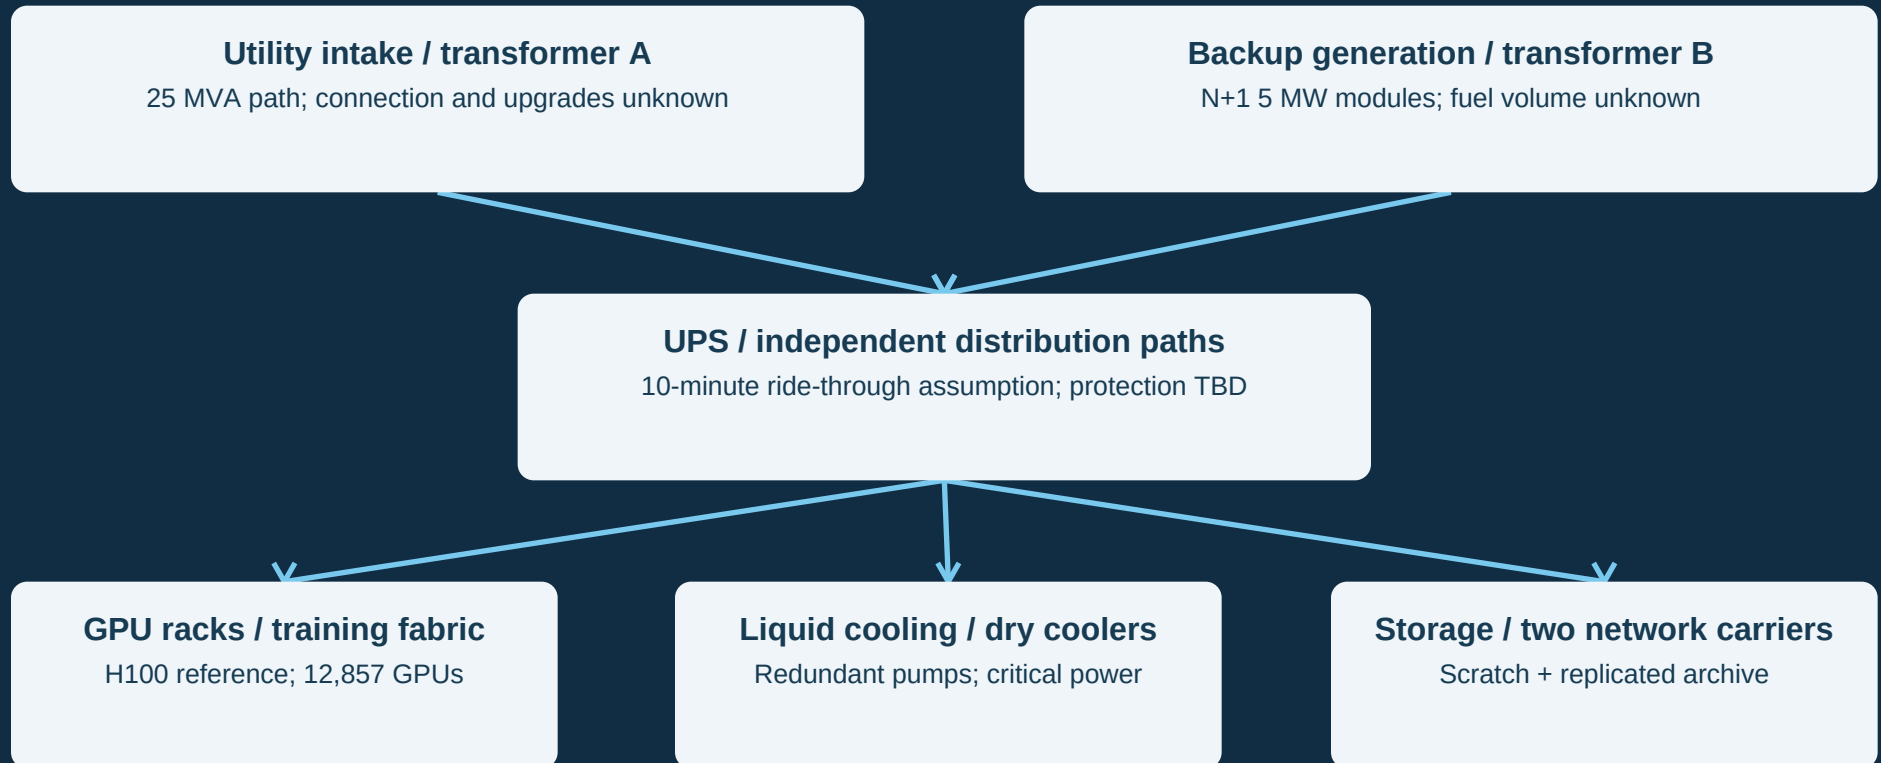

Largest component: 25 MVA transformer. Isolate failed path; UPS bridges transfer; shed load if remaining capacity is insufficient.

Full-load failover requires power-factor, switching, protection and thermal studies. No assumed 25 MW guarantee from MVA.

48-hour outage: UPS -> generators -> critical IT/cooling/network. Defer noncritical jobs, checkpoint and lease overflow.

Fuel burn/resupply, generator endurance, permits and carrier/cooling continuity are unverified. Restart is staged.